







Date: MAY 07, 2020

中国认可 国际互认 检测 TESTING CNAS L4743

Page 1 of 6

Test Report

POSTER AND PANEL SL

C/ PLANS DE LA SALA 28. POL. IND. PLANS DE LA SALA 08650 SALLENT (BARCELONA)

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

Sample Description: TANGO 200GR

Color: WHITE

Test Requested:

EN 13501-1:2018 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests

Test Results: -- See attached sheet -

Test Period:

Sample Receiving Date : APR.20, 2020

Test Performing Date : APR.20, 2020 TO APR.26, 2020

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou Lab Manager





Test Report Date: MAY 07, 2020 Page 2 of 6

I. Test conducted

This test is conducted as per EN 13501-1:2018 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- 2. EN ISO 11925-2: 2010+Corl:2011 Reaction to fire tests Ignitability of building products subjected to direct impingement of flame Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "Fabric" is defined as a decorative sheet. Its classification is valid for the following end use application: LED Light Box, Frame System, Pop-up, Sun-umbrellas, SEG.

b) Description

Description	Tango 200gr	
Color White		
Sample size	EN 13823:1500mm×1000mm &1500mm×495mm EN ISO 11925-2: 250mm×90mm	
Mass per unit area	175 g/m ²	
Test surface Coating surface		

Mounting and fixing:

The test specimens are fixed mechanically in the trolley, champed at the top and the bottom.

III. Test results

Test method	Parameter	Number of tests	Results
	FIGRA _{0.2MJ} (W/s)		37.4
	FIGRA _{0.4MJ} (W/s)		37.4
	Whether lateral flame spread (LFS) to the edge of specimen (Yes/No)		No
EN 13823	THR _{600s} (MJ)	3	4.2
	SMOGRA (m ² /s ²)		0.8
	TSP _{600s} (m ²)		15.9
	Flaming particles or droplets (Yes/No)		No

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspy.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined rerein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced extension in the company of the company. Any unauthorized alteration, forgety or faisification of the content or appearance or this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the



Test Report Date: MAY 07, 2020

Test method	Parameter	Specimen number	Results
EN ISO 11925-2	Whether vertical flame spread (Fs) in excess of 150 mm within 60s (Yes/No)	6	No
Exposure = 30 s	Ignition of the filter paper (Yes/No)		No

IV. Classification and field of application

a) Reference of classification

This classification has been carried out in accordance with EN 13501-1:2018.

b) Classification

The product, Fabric, in relation to its reaction to fire behaviour is classified:

Fire behaviour		Smoke production			Flaming	droplets
В	_	S	1	,	d	0

Reaction to fire classification: B-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.

c) Field of application

This classification is valid for the following end use applications:

- --- With mechanically fixing
- --- No joint.

This classification is valid for the following product parameters:

--- Characteristics as described in section II b) of this test reports.

Statement:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

To be continued...

Page 3 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gsg.com/en/Terms-and-Conditions.appy and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gsg.com/en/Terms-and-Conditions/Terms-e-Document aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction susues defined reien. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If any. The Company's sole responsibility is its Client at this document does not oxwards parties to a transaction from exercising all their inflies are obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alterration, forgety or falsification of the content or appearance of this exercision of the content or appearance of this securent is independent and the searchers may be prosecuted to the fullest extent of 100 MeV. Those otherwise stated the



Test Report

Date: MAY 07, 2020 Page 4 of 6

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)	Classification criteria	Additional classification	
A1	EN ISO 1182 ª	and	△ <i>T</i> ≤30°C, and △ <i>m</i> ≤50%, and t _f =0(i.e. no sustained flaming)	-	
	EN ISO 1716		PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ² ^d and PCS≤2.0MJ/kg ^e	-	
	EN ISO 1182 a or		△ <i>T</i> ≤50°C, and △ <i>m</i> ≤50%, and t _f ≤20 s	-	
A2	EN ISO 1716	and	PCS≤3.0MJ/kg ^a and PCS≤4.0MJ/m ² ^b and PCS≤4.0MJ/m ^{2 d} and PCS≤3.0MJ/kg ^e	-	
	EN 13823		FIGRA≤120W/s and LFS< edge of specimen and THR _{600s} ≤7.5MJ	Smoke production ^f and Flaming droplets/particles ^g	
В	EN 13823	and	FIGRA≤120W/s and LFS< edge of specimen and THR _{600s} ≤7.5MJ	Smoke production ^f and	
	EN ISO 11925-2 i Exposure = 30s		within 60s <i>F</i> s≤150mm	- Flaming droplets/particles ^g	
С	EN 13823	and	FIGRA≤250W/s and LFS< edge of specimen and THR _{600s} ≤15MJ	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 i Exposure=30s		Fs≤150mm within 60 s		
_	EN 13823	and	FIGRA≤750W/s	Smoke production ^f and	
D	EN ISO 11925-2 i Exposure=30s		<i>F</i> s≤150mm within 60 s	Flaming droplets/particles ^g	
Е	EN ISO 11925-2 i Exposure =15s		Fs≤150mm within 20 s	flaming droplets/particles h	

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document as http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits of Clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test Report Date: MAY 07, 2020 Page 5 of 6

F	EN ISO 11925-2 ⁱ Exposure = 15 s	Fs>150mm within 20 s
l l	•	

- ^a For homogeneous products and substantial components of non-homogeneous products.
- ^b For any external non-substantial component of non-homogeneous products.
- ° Alternatively, any external non-substantial component having a PCS ≤ 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA ≤ 20 W/s, and LFS < edge of specimen, and THR_{600s} ≤ 4,0 MJ, and s1, and d0.
- ^d For any internal non-substantial component of non-homogeneous products.
- ^e For the product as a whole.
- f s1 = SMOGRA ≤ $30m^{2}/s^{2}$ and TSP $_{600s}$ ≤ $50m^{2}$; s2 = SMOGRA ≤ $180m^{2}/s^{2}$ and TSP $_{600s}$ ≤ $200m^{2}$; s3 = not s1 or s2
- gd0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.

Ignition of the paper in EN ISO 11925-2 results in a d2 classification.

- ^hPass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- ⁱUnder conditions of surface flame attack and, if appropriate to the end–use application of the product, edge flame attack.

To be continued...




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only ad within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Test Report Date: MAY 07, 2020 Page 6 of 6

Photo Appendix:

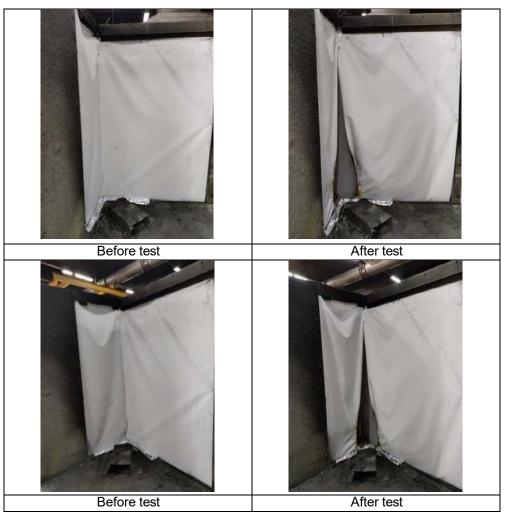

SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terma-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.