

PIXEL 3200 K UV LED

- 4-6 colors + white.
- Grayscale printhead Konica Minolta 1024a, variable ink drop size of 6-18 pl/4.8-15 pl.
- 4-level grayscale printing.
- Dynamic curing LED UV lamps.
- Printing speed up to 100/440 sqm/hr.
- Resolution up to 600*2400 dpi.
- RIP software: Photoprint Server Flora included, Onyx, optional Caldera.
- One-year warranty.



Konica solution

PRINTING MODE	SPEED
Express (4 pass)	136 sqm/h
Production (6 pass)	103 sqm/h
Quality (8 pass)	68 sqm/h






Vacuum table, conveyor belt movement, extension tables that expand the printing format for materials.



Rigid media size:
205 x 305 cm.

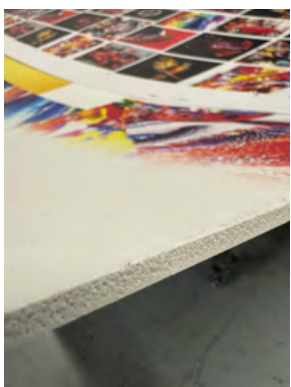

Material thickness up to 50mm.



8 printheads for CMYK colors + 2 printheads for white.



Compatible image formats: TIFF, JPEG, Postscript, EPS, PDF, CMYK, RGB.



Flexible media size: material width up to 205 cm, roll diameter up to 30 cm.

Environmental requirements

- Temperature: 20-30°C.
- Humidity: 40-80% (non-condensing).
- Net weight: 3000kg / 4000kg
- Dimensions: (Width x Depth x Height) 6000mm x 1550mm x 1600mm
- Power: 200-240V AC, single phase, 50/60hz, 25A (printer), 25A (UV lamp).